

Malte AdBlue & Washer fluid



The Malte AdBlue unit is manufactured in Sweden and specially adapted to the demanding climate of the Nordics.

The unit is delivered with an integrated MID approved dispenser. It is suitable for both public and private commercial fuel stations. Its robust construction and temperature-resistant insulation protect against cold, solar heat and other weather-related damage. It is easy to maintain with a roof hatch and lockable doors for technical equipment. All components are made of the highest quality.



Filling positions

The dispenser, hose and display can be positioned in three different configurations, accommodating refuelling from either side. A front position is standard.

Seamless communication

The dispenser is equipped with advanced electronics capable of handling most market protocols, facilitating seamless connections to card terminals or cash systems. It's approved for integration with Bank Card terminals.

MID approved
 Engineered for the Nordic climate
 Plug & Play
 Custom branding

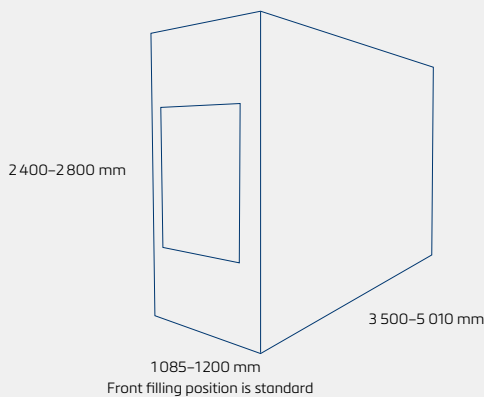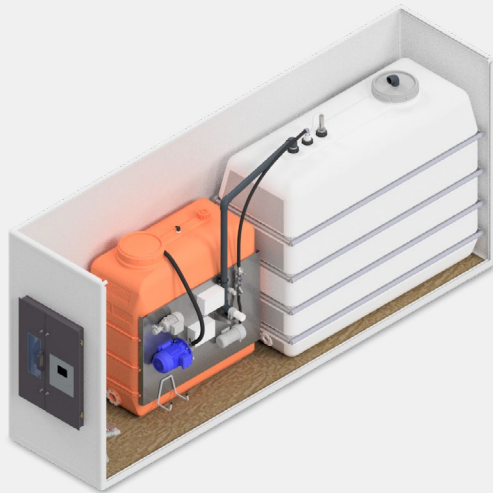

Standard features

- Stainless steel Dripless couplings (2") for filling
- Outer walls composed of 25 mm insulated sandwich panels
- Roof hatch for easy level gauge exchange
- Steel bottom frame with integrated fork pockets
- 4,5 m hose for filling
- Overfill protection during truck refilling
- Lockable door for access to the filling room
- Stainless steel facade with integrated dispenser
- MID approved
- Price display with liter and total price indicators
- Automatically controlled heating system
- 4 m³ volume capacity

Optional features

- Custom decalation to match your graphic profile
- LED lighting in the filling room
- Level gauge
- Unit available without dispenser
- Temperature sensor
- 5 m³/8 m³ AdBlue
- Signal when AdBlue door is open
- Washer Fluid
- Loading pump for Washer fluid
- Door signal when AdBlue door is not closed correctly
- IFSF
- Tank top valve
- Additional options available upon request

Dimensions

	Unit 5 m ³	Unit 4 m ³	S/A
Length	4 055 mm	3 500 mm	5 010 mm
Width	1 085 mm	1100 mm	1200 mm
Height	2 800 mm	2 400 mm	2 400 mm
Weight	680 kg	650 kg	930 kg
Volume	5 000 liters	4 000 litres	4 000 + 1500 liters